

# Sartofine PP

## Particle & Bioburden Reduction Filter Capsules



### Description

Sartofine PP, un-pleated, depth filters feature 4 to 7 filter zones, each 14 mm in thickness. Each zone, made up of polypropylene filter layers is a homogeneous depth filter itself. The nominal retention rating of these successive zones becomes increasingly finer in the direction of filtration. Therefore Sartofine PP filters are ideally suited for all applications requiring exceptional high dirt holding capacity and provide an added benefit of high total throughput.

### Applications

Whether in the bio-pharmaceutical or chemical industry, Sartofine PP filter capsules are used wherever liquids with a wide range of particle sizes need to be prefiltered or clarified. A range of 7 different retention ratings (0.5 µm to 40 µm), depending on the size of the particles to be removed, allows you to select the filter type which best suits your particular application.

### Efficiency

Particle removal by fractionated depth filtration ensures optimal use of the entire multi-layer which results in a long service life of the filter. The filtration efficiency is enhanced by the filter cake that can be built up within the depths of each filter zone, retaining colloids in the finer filter zones.

### Mechanical Stability

Sartofine PP filter capsules have been designed for daily routine use. Our special production method of wrapping the filter layers tightly around the supportive core of the cartridge provides high mechanical stability and eliminates the common problem of breakthrough. The thermally bonded exterior layer and our special welding technique for joining filter layers and end caps impart structural integrity in all Sartofine PP filter cartridges - allowing for easy back flush of the filters during cleaning.

### Documentation

Sartofine PP capsules are designed, developed and manufactured in accordance with a ISO 9001 certified Quality Management System. A Validation Guide is available for compliance with regulatory requirements.

### Specifications

#### Materials

Filter Material:	Multiple Polypropylene layers
Support Fleece:	Polypropylene
Core:	Polypropylene
End caps:	Polypropylene
Outer shell:	Polypropylene

#### Retention Rates

0.5 µm, 0.7 µm, 1 µm, 3 µm, 5 µm, 10 µm, 15 µm, 20 µm, 40 µm

#### Available Sizes | Filtration Area

Size 7	0.007 m <sup>2</sup>	0.08 ft <sup>2</sup>
Size 8	0.013 m <sup>2</sup>	0.14 ft <sup>2</sup>
Size 9	0.022 m <sup>2</sup>	0.24 ft <sup>2</sup>
Size 0	0.044 m <sup>2</sup>	0.48 ft <sup>2</sup>

#### Available Connectors

SS, SO, OO

#### Operating Parameters

Max. Allowable Differential Pressure:	4 bar	58 psi at 20 °C
	2 bar	29 psi at 80 °C
Max. Allowable Back Pressure:	2 bar	29 psi at 20 °C

# Depth Filter Capsules

## Specifications

### Extractables

Sartofine PP capsules meet, or exceed the requirements for WFI quality standards set by the current USP.

### Regulatory Compliance

Non pyrogenic according to USP Bacterial Endotoxins

Pass USP Plastic Class VI Test

Non fiber releasing according to 21 CFR

## Sterilization

### Autoclaving:

134 °C, 2 bar | 29 psi, 30 min

### Sterilization Cycles


Autoclaving: Min. 25

## Technical References

### Validation Guide


SPK 5707-e

Sartofine 10" Standard Capsules, 0.5 µm, 0.7 µm, 1 µm

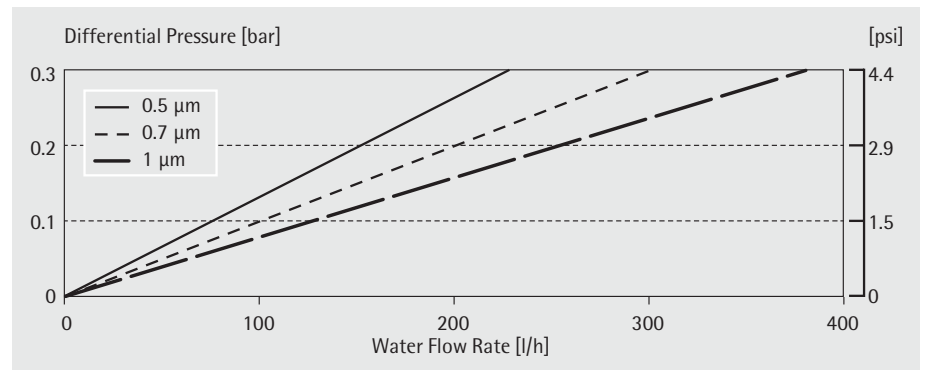


Standardized at 20 °C

Sartofine 10" Standard Capsules, 3 µm, 5 µm, 10 µm

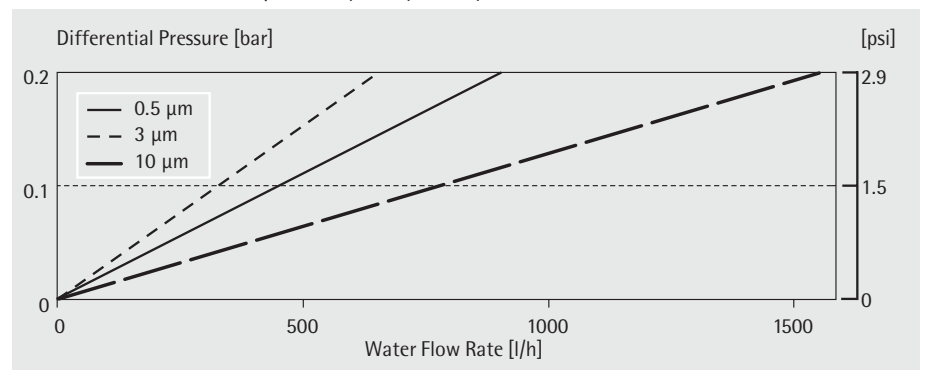


Standardized at 20 °C

Sartofine 10" Standard Capsules, 20 µm, 40 µm

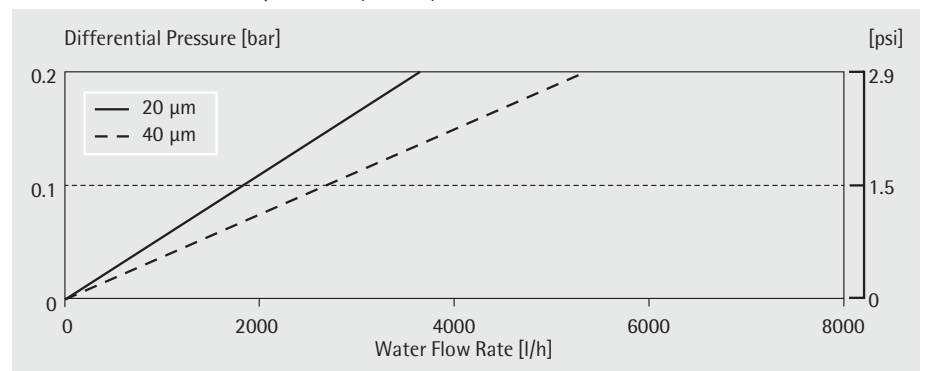

Standardized at 20 °C

## Ordering Guide:

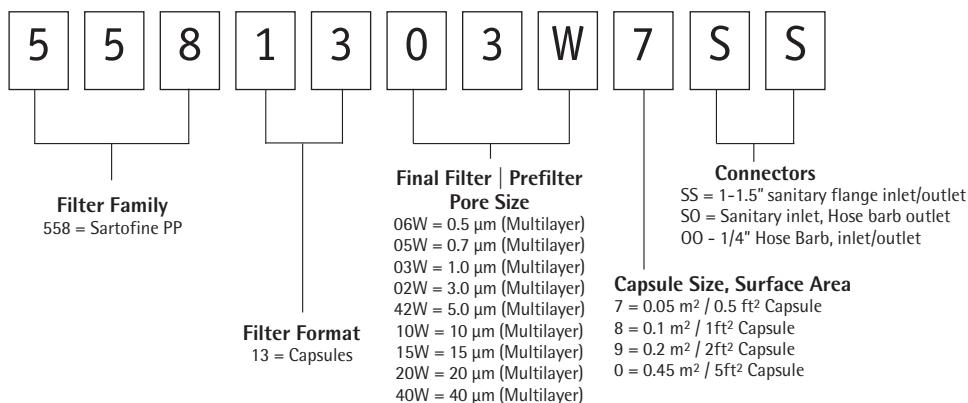

Sartorius AG  
 Weender Landstrasse 94-108  
 37075 Goettingen, Germany  
 Phone +49.551.308.0  
 Fax +49.551.308.3289  
 www.sartorius.com

USA +1.631.2544249  
 UK +44.1372.737100  
 France +33.1.69192100  
 Italy +39.055.634041  
 Spain +34.91.3586100  
 Japan +81.3.3293366

Specifications subject to change without notice.  
 Printed and copyrighted by Sartorius - W/sart-000 - G  
 Publication No.: S--2024-am04051  
 Order No.: 85030-520-16